

CM-TP-6RC, CM-TP-12RC

* Outdoor Unit (DR-DW2N)



CM-TP-6RC, CM-TP-12RC

Feature : • Variable system composition (6 or 12 household) • Calling & paging • ID setting by DIP Switch • Effective calling to all units by Paging function • Door lock release(optional) • Easy identification of which sub-unit is in use by LED indication • Possible to use door phone by enabling DR-DW2N connection

Connectable Products : DR-DW2N

Wiring : 4 Wires/ 500m(0.65ø)

Power : DC 12V(RF-1A)

Dimensions (W/H/D) : 114 x 220 x 66(mm)




DR-DW2N




Door Unit only for CM-TP-6RC & CM-TP-12RC

■ DIMENSIONS

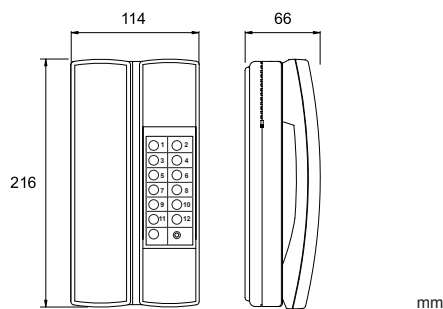

■ DIMENSIONS

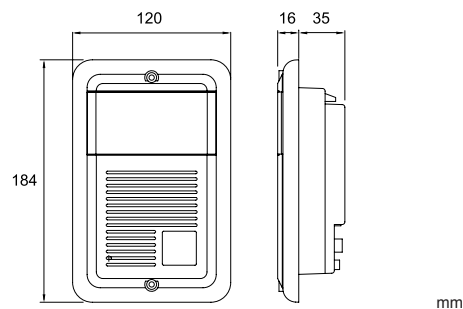

■ SYSTEM DIAGRAM

CM-TP-6RC, CM-TP-12RC

